

MORTAL KOMBAT KIT

Amendment

The following items were changed after the MORTAL KOMBAT KIT manuals were produced. Please keep this amendment with your MORTAL KOMBAT KIT manual.

Page 1-3

Parts List

50K Ω Pot. 5014-12925-00

Page 1-15

PLAY SOUNDS test synthesized & digitized sounds from the Sound Board. Advance to the next sound by pressing any action button. Press either Start button to repeat a sound.

Page 2-3 and inside back cover

Jumper Chart

CPU Board Version 5770-12555-00 Rev. B*

W2, W8, W11, W12, W14, W21, W22, W24, W27, W29, W30, W32, W34, W36, W39, W41, W42, W45, W47, W48, W50, W52, W55, W57, W58, W60, W62, W65, W68, W69, W71, W73, W75, W77, W80

* Part number version and revision level located on solder side of PC board.

U17 24 Mhz xtal used on version 5770-12555-00 rev. B.

CPU Board Version 5770-12555-03 Rev. C*


W2 W11, W12, W14, W21, W22, W24, W27, W29, W30, W32, W34, W36, W39, W41, W42, W45, W47, W48, W50, W52, W55, W57, W58, W60, W62, W65, W68, W69, W71, W73, W75, W77, W80, W84

U17 24 Mhz Xtal not used on version 5770-12555-03 rev. C.

Standard Pricing


Name	Settings Credit/Coin	Left Chute	Center Chute	Right Chute	Fourth Chute
USA 1	1/25e (2 to Start; 2 to Continue)	25e		25e	
USA 2	1/25e (2 to Start; 1 to Continue)	25e		25e	
USA 3	1/25e (1 to Start; 1 to Continue)	25e		25e	
USA 4	1/50e, 3/\$1.00 (1 to Start; 1 to Continue)	25e		25e	
USA 5	1/50e, 4/\$1.00 (2 to Start; 1 to Continue)	25e		25e	
USA 6	1/50e (1 to Start; 1 to Continue)	25e		25e	
USA 7	1/50e, 3/\$1.00 (1 to Start; 1 to Continue)	25e		25e	
USA 8	1/50e, 4/\$1.00 (1 to Start; 1 to Continue)	25e	\$1.00	25e	
USA ECA	1/25e, 4/\$1.00 (2 to Start; 2 to Continue)	\$1.00	10e	25e	5e
German 1	1/1DM, 6/5DM	1 DM		5 DM	
German 2	1/1DM, 7/5DM	1 DM		5 DM	
German 3	1/1DM, 8/5DM	1 DM		5 DM	
German 4	1/1DM, 5/5DM	1 DM		5 DM	
German 5	1/1DM, 6/5DM	1DM		5DM	
German ECA	1/1DM, 2/2DM, 6/5DM	5DM	1DM	2DM	
France 1	2/5F, 5/10F	5 F		10 F	
France 2	2/5F, 4/10F	5 F		10 F	
France 3	1/5F, 3/10F	5 F		10 F	
France 4	1/5F, 2/10F	5 F		10 F	
France 5	2/5F, 5/10F, 11/2 x 10F	5F		10F	
France 6	2/5F, 4/10F, 9/2 x 10F	5F		10F	
France 7	1/5F, 3/10F, 7/2 x 10F	5F		10F	
France 8	1/5F, 2/10F, 5/2 x 10F	5F		10F	
France 9	1/3 x 1F, 2/5F	1F		5F	
France 10	1/2 x 1F, 3/5F	1F		5F	
France 11	1/3 x 1F, 2/5F, 5/2 x 5F	1F		5F	
France 12	1/2 x 1F, 3/5F, 7/2 x 5F	1F		5F	
France ECA	1/3 X 1F, 2/5F, 5/2 X 5F	1F	10F	5F	
Canada	1/2 x 25e, 3/\$1.00	25e		\$1.00	
Swiss 1	1/1F, 6/5F	1F		5F	
Swiss 2	1/1F, 7/5F	1F		5F	
Swiss 3	1/1F, 8/5F	1F		5F	
Italy	1/500 lire	500 lire		500 lire	
UK 1	1/20P, 3/50P	20P		50P	
UK 2	2/20P, 5/50P	20P		50P	
UK ECA	1/20P, 3/50 P, 7/£1.00	£1.00	20P	50P	10 P
UK Elec w/CCU	1/30P, 2/50P, 4/£1.00	£1.00		CCU	
Spain 1	1/100 peseta, 6/500 peseta	100 peseta		500 peseta	
Spain 2	1/100 peseta, 5/500 peseta	100 peseta		500 peseta	
Australia 1	1/3 x 20e, 2/\$1.00	20e		\$1.00	
Australia 2	1/5 x 20e, 1/\$1.00	20e		\$1.00	
Japan 1	1/100 yen	100 yen		100 yen	
Japan 2	2/100 yen	100 yen		100 yen	
Austria 1	1/5 schilling, 2/10 schilling	5 schilling		10 schilling	
Austria 2	1/2 x 5 schilling, 3/2 x 10 schilling	5 schilling		10 schilling	
Belgium 1	1/20F	20F		20F	
Belgium 2	3/20F	20F		20F	
Belgium 3	2/20F	20F		20F	
Belgium ECA	1/25e, 4/\$1.00	50F	5F	20F	
Sweden	1/3 x 1 krona, 2/ krona	1 krona		5 krona	
New Zealand 1	1/3 x 20e	20e		20e	
New Zealand 2	1/2 x 20e	20e		20e	
Netherlands	1/1HFI, 3/2.5HFI	1HFI		2.5HFI	
Finland	1/1 markka	1 markka		1 markka	
Norway	1/2 x 1 krone, 3/5 x 1 krone	1 krone		1 krone	
Denmark	1/2 x 1 krone, 3/5 krone, 7/2 x 5 krone	1 krone		5 krone	
Antilles	1/25e, 4/1 guilder	25e		1 guilder	
Hungary	1/2 x 10 forint, 3/2 x 20 forint	10 forint		20 forint	

A-14732-40025

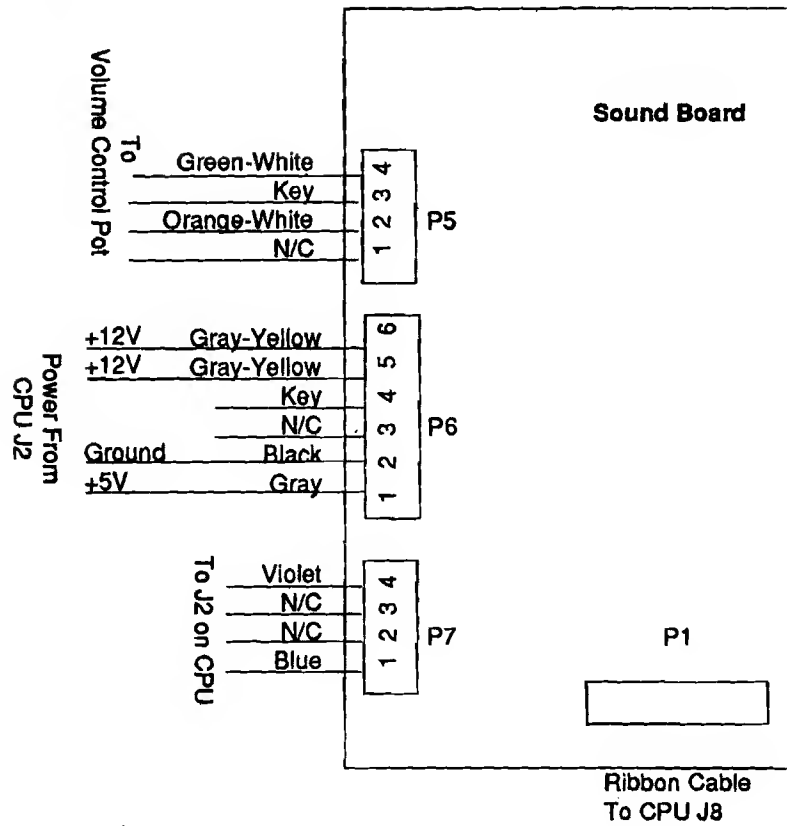

CPU Schematic sheet 1 of 16.

W84 added and W8 deleted on CPU Board Version 5770-12555-03 Rev. C.

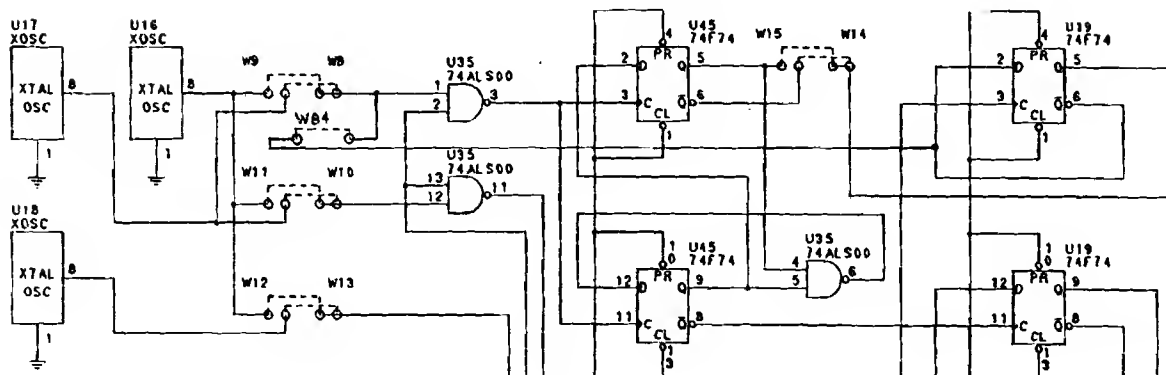

16-9383
 TEMPLATE CONTROLS
 USED ON 43125 KIT

